



US006181294C1

(12) EX PARTE REEXAMINATION CERTIFICATE (9184th) United States Patent

Porter et al.

(10) Number: **US 6,181,294 C1**

(45) Certificate Issued: **Aug. 14, 2012**

(54) **ANTENNA FOR ELECTRIC METER AND METHOD OF MANUFACTURING THEREOF**

(58) **Field of Classification Search** None
See application file for complete search history.

(75) Inventors: **Lawrence R. Porter**, Dallas, TX (US);
John Paul King, Arlington, TX (US);
Doug Justice, Wilsonville, OR (US)

(56) **References Cited**

To view the complete listing of prior art documents cited during the proceeding for Reexamination Control Number 90/011,710, please refer to the USPTO's public Patent Application Information Retrieval (PAIR) system under the Display References tab.

(73) Assignee: **TransData, Inc.**, Richardson, TX (US)

Reexamination Request:

No. 90/011,710, May 24, 2011

Primary Examiner—Anjan K. Deb

Reexamination Certificate for:


Patent No.: **6,181,294**
Issued: **Jan. 30, 2001**
Appl. No.: **09/040,113**
Filed: **Mar. 17, 1998**

(57) **ABSTRACT**

For use with an electric meter chassis having a dielectric housing protruding therefrom, an antenna for allowing electric meter circuitry within the chassis to communicate wirelessly through the dielectric housing and a method of manufacturing the same. In one embodiment, the antenna includes: (1) antenna elements, located within the dielectric housing and adapted to transmit and receive electromagnetic radiation and (2) a balance circuit, coupled to the antenna elements to cause the antenna elements to act as an antenna and coupleable to an unbalanced output port of a wireless communication circuit, that balances an impedance of the unbalanced output port thereby to balance the antenna.

(51) **Int. Cl.**
G01D 4/00 (2006.01)
H01Q 9/04 (2006.01)
H01Q 9/16 (2006.01)
H01Q 1/22 (2006.01)
G01R 22/00 (2006.01)

(52) **U.S. Cl.** **343/859; 324/142; 340/870.02; 340/870.03; 343/872; 343/719**

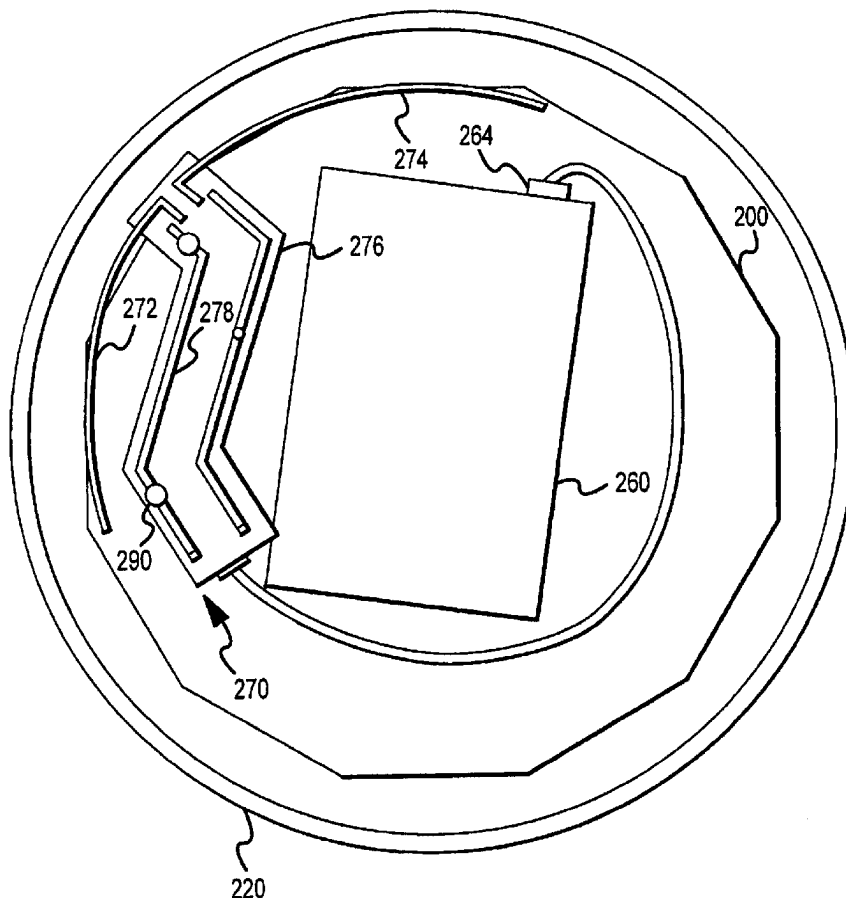

**EX PARTE
REEXAMINATION CERTIFICATE
ISSUED UNDER 35 U.S.C. 307**

THE PATENT IS HEREBY AMENDED AS
INDICATED BELOW.

Matter enclosed in heavy brackets [] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made to the patent.

AS A RESULT OF REEXAMINATION, IT HAS BEEN DETERMINED THAT:

The patentability of claims 17-30 is confirmed.

Claims 1, 3, 4, 9, 11 and 12 are determined to be patentable as amended.

Claims 2, 5-8, 10 and 13-16, dependent on an amended claim, are determined to be patentable.

1. An antenna for use with an electric meter chassis having a dielectric housing protruding therefrom, said antenna allowing electric meter circuitry within said chassis to communicate wirelessly through said dielectric housing, comprising:

antenna elements, located within said dielectric housing and adapted to transmit and receive electromagnetic radiation; and

a balance circuit, coupled to said antenna elements to cause said antenna elements to act as said antenna and couplable to an unbalanced output port of a wireless communication circuit *that is also coupled to said electric meter circuitry*, that balances an impedance of said unbalanced output port thereby to balance said antenna.

3. The antenna as recited in claim 1 wherein said chassis comprises *said* electric meter circuitry located in a circuit board rack within said dielectric housing, said antenna elements located between circuit boards in said circuit board rack.

4. The antenna as recited in claim 1 wherein said chassis[: electric meter circuitry located in said dielectric housing; and] *further* comprises an electromagnetic shield located about at least a portion of said electric meter circuitry.

9. A method of manufacturing an antenna for use with an electric meter chassis having a dielectric housing protruding therefrom, said antenna allowing electric meter circuitry within said chassis to communicate wirelessly through said dielectric housing, comprising the steps of:

locating antenna elements within said dielectric housing, said antenna elements adapted to transmit and receive electromagnetic radiation; and

coupling a balance circuit to said antenna elements to cause said antenna elements to act as said antenna, said balance circuit couplable to an unbalanced output port of a wireless communication circuit *that is also coupled to said electric meter circuitry*, to balance an impedance of said unbalanced output port and thereby balance said antenna.

11. The method as recited in claim 9 further comprising the step of placing *said* electric meter circuitry in a circuit board rack within said dielectric housing, said antenna elements located between circuit boards in said circuit board rack.

12. The method as recited in claim 9 further comprising the [steps] *step* of[: placing electric meter circuitry in said dielectric housing; and] placing an electromagnetic shield about at least a portion of said electric meter circuitry.

* * * * *